



|  |  |
|--|--|
| <b>Model</b>   | SR44W                                  |
| <b>System</b>  | Zinc-Silver oxide/Alkaline Electrolyte |
| <b>Nominal Voltage (V)</b>                           | 1.55                                   |
| <b>Nominal Capacity (mAh)*</b>                       | 165                                    |
| <b>Nominal Discharge Current (<math>\mu</math>A)</b> | 200                                    |
| <b>Temperature Ranges (deg. C)</b>                   | <b>min.</b> <b>max.</b>                |
| <b>Operating</b>                                     | -10          +60                       |
| <b>Weight (g)</b>                                    | 2.2                                    |
| <b>Dimensions (mm)</b>                               |  |
| <b>Diameter</b>                                      | 11.6                                   |
| <b>Height</b>  | 5.4                                    |




## Characteristics


### Discharge Characteristics

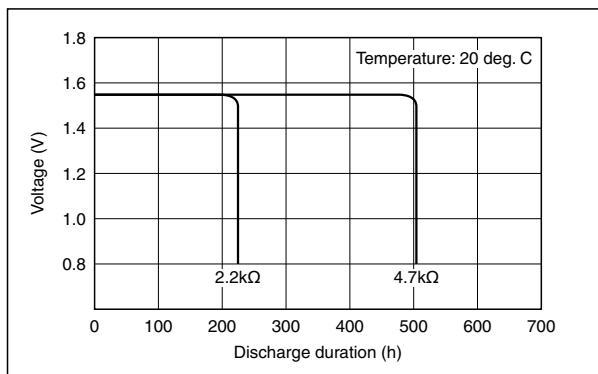

### Pulse Discharge Characteristics

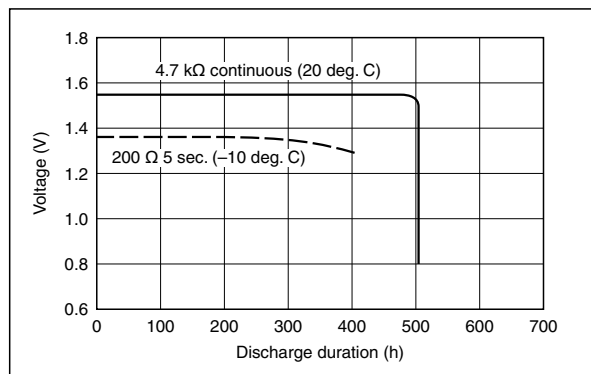

### Temperature Characteristics

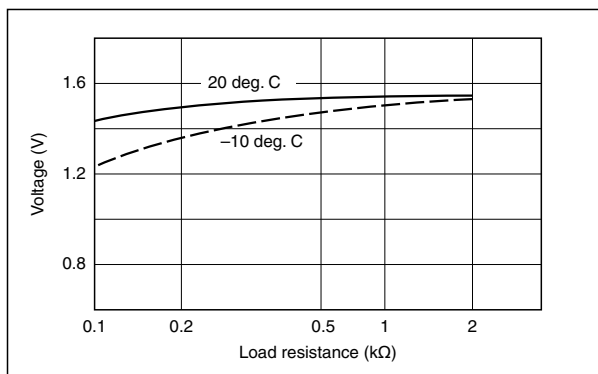

\* Nominal capacity indicates duration until the voltage drops down to 1.2V when discharged at a nominal discharge current at 20 deg. C.